


CUSTOM FACEPLATES FOR GUITAR AND BASS AMPLIFIERS

WWW.AMPLATES.COM • (202) 656-0080

CAPACITOR VALUE DECODING KEY

pF (picofarad)	nF (nanofarad)	uF (microfarad)	Code on Cap
1000	1 or 1n	0.001	102
1500	1.5 or 1n5	0.0015	152
2200	2.2 or 2n2	0.0022	222
3300	3.3 or 3n3	0.0033	332
4700	4.7 or 4n7	0.0047	472
6800	6.8 or 6n8	0.0068	682
10000	10 or 10n	0.01	103
15000	15 or 15n	0.015	153
22000	22 or 22n	0.022	223
33000	33 or 33n	0.033	333
47000	47 or 47n	0.047	473
68000	68 or 68n	0.068	683
100000	100 or 100n	0.1	104
150000	150 or 150n	0.15	154
220000	220 or 220n	0.22	224
330000	330 or 330n	0.33	334
470000	470 or 470n	0.47	474

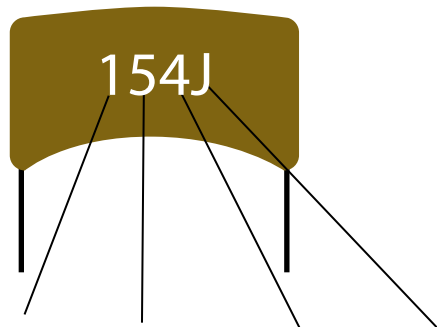

1st figure 2nd figure Multiplier Tolerance

**(Note that value will be in pF;
in the above example 154J = 150000pF = .15uF)**

Letter	Tolerance
B	± 0.1pF
C	± 0.25pF
D	± 0.5pF
F	± 1%
G	± 2%
H	± 3%
J	± 5%
K	± 10%
M	± 20%